
American Standard

Lynbrook Int WH Urinal

Urinal



DIMENSIONAL DRAWING

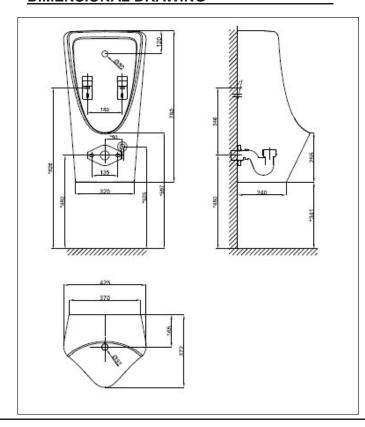

FEATURES

• Installation: Wall-hung

• Design: Modern design

• Flushing Type: Spreader

Water Saving: 0.5 LPF

• Antibacterial Coating: Comfort Clean

SPECIFICATIONS

• Liters Per Flush: 0.5 LPF

P/S-Trap: P trap with Back Inlet hole

Overall Dimensions (HxWxP):

H780 x W 425 x P 372 mm

• Material: Vitreous China

 Power Supply: DC 6V 4pcs AA Alkaline batteries (2.5-year 100cycles/day)

AC 100V-240V 50/60 Hz

• Sensor Type: Infrared Sensor

Stadium Mode & 24 Hours Hygiene Flush

• Sensing Distance: Factory setting 70±5cm

(20cm~75cm adjustable)

• Sensor Waterproof Level: IPX7

COLOR AVAILABILITY

White only (0)

OPTIONS

DC version CCAS6519-3110410F0

• AC version CCAS6519-3120410F0

INCLUDED COMPONENTS

 Flush valve kits, Metal Brackets & Screws, Inlet hose & Outlet P trap

SHIPPING WEIGHT AND DIMENSIONS

825 x 460 x 430 mm

33kg

STANDARDS CRITERIA

GB28377-2019/PNS 156-2000

This document is the property of American Standard. It can neither be reproduced, nor communicated, without authorization.

American Standard reserves the right to change dimensions and specifications without notice; we assume no liability for the use of obsolete dimensions.