

## MONOBLOCK CASTING - PERFECTLY SEAMLESS



### 3-LAYER GLAZING TECHNOLOGY

Smooth, glossy surface; easy to clean; resists yellowing.





### FULLY GLAZED INTERNAL PIPES

Prevents bacterial growth, ensures fast drainage, and avoids clogging.



### HIGH-TEMPERATURE FIRING (1280°C)

Dense, solid structure; high durability; low water absorption rate.

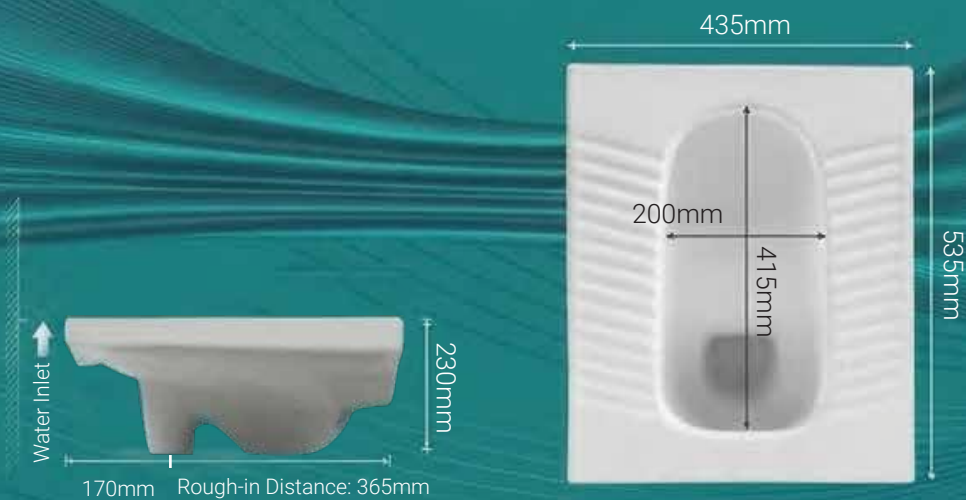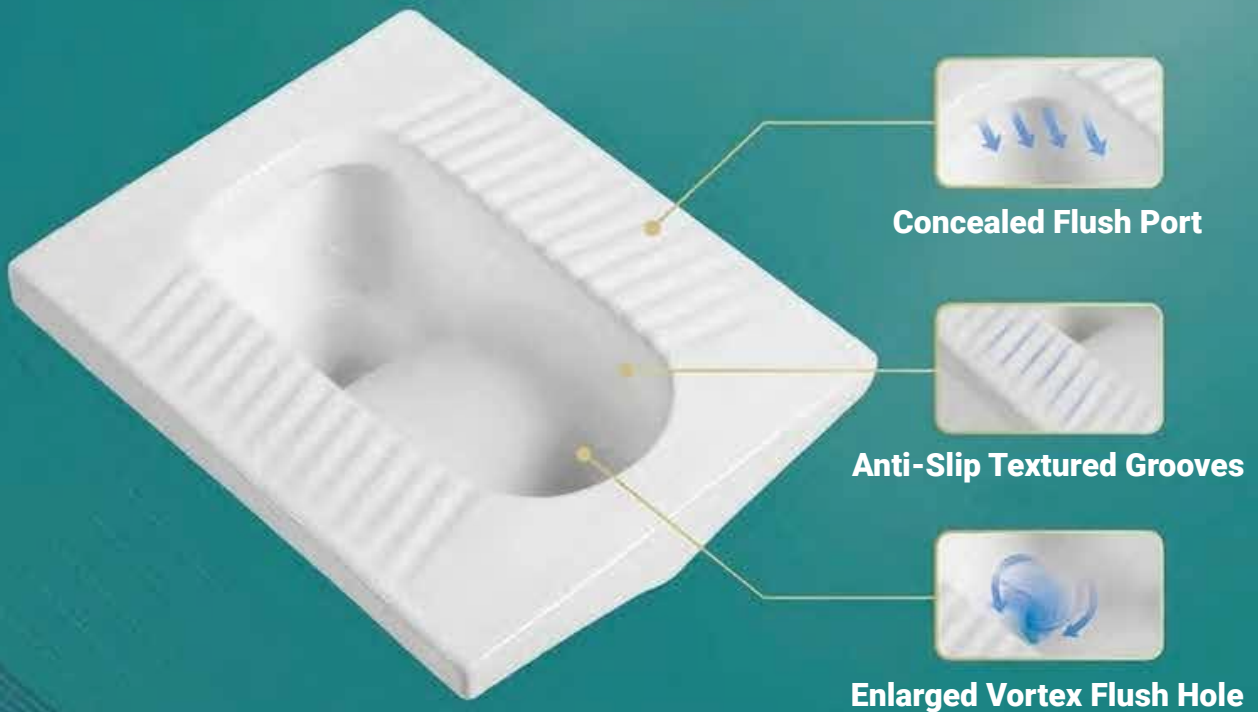

*Note: Actual product dimensions may vary slightly. (Unit: mm)*



## INSTALLATION DIAGRAM: SQUAT TOILET AND WATER TANK

*Note: Actual product dimensions may vary slightly. (Unit: mm)*

### TECHNICAL SPECIFICATIONS

- Squat Toilet Dimensions: 535x435x230mm
- Water Tank Dimensions : 420x110x360mm
- Water flow rate (2 modes): 3/6 liters
- Water Supply Pressure: 0.05 - 0.7MPa
- Water Flush Pressure of Squat Toilet: 0.07 - 0.5MPa

