

描述


- 产品规格: 183 x 164 x 112mm
- 通用性设计, 适用于多种水路及控制阀体
- 金属结构, 全铜水路
- 自带止逆阀设计
- 理想工作压力: 0.1~0.5MPa
- 冷水进水温度: 4~29℃; 热水进水温度: 55~85℃
- 冷热供水压力差不大于0.2MPa, 如过热水或冷水压力过低, 可能导致出水温度不稳定
- 连接管G1/2; 左热右冷; 中心距为46mm

操作

- 实心墙安装或空心墙安装
- 预埋深度调节范围80~105mm

执行标准





- 设计符合 GB18145-2014

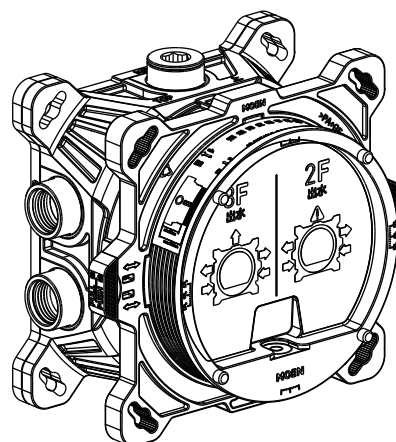

入墙式花洒通用预埋盒

型号: UR4000

单位: mm

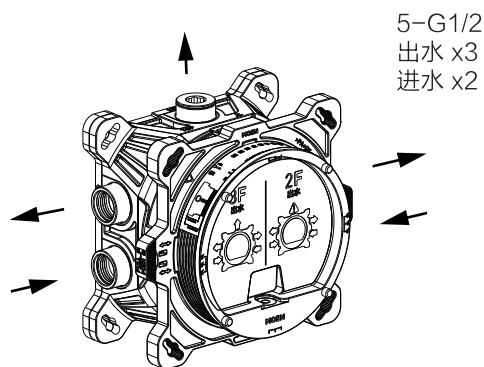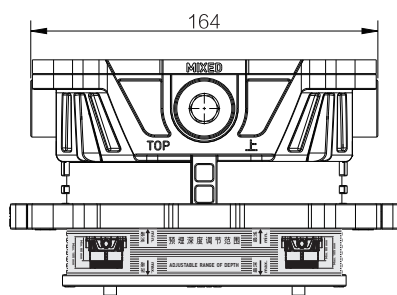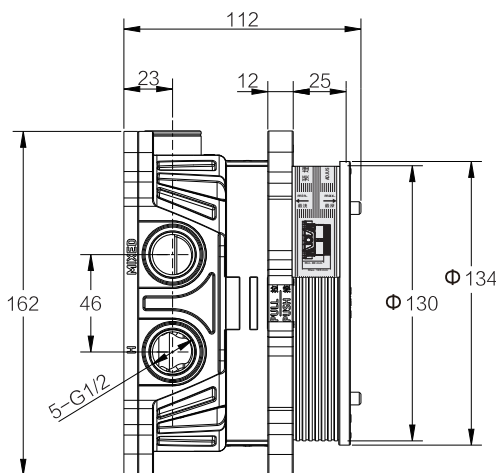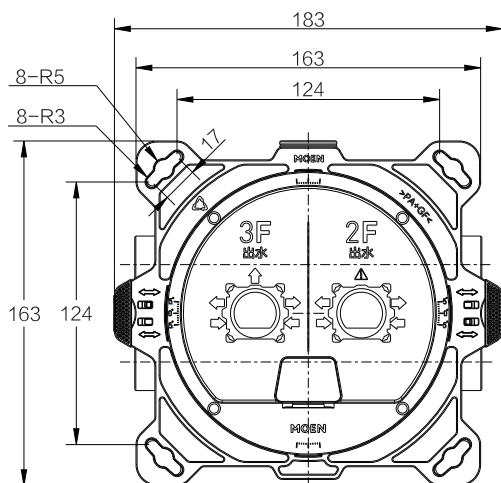

DESCRIPTION

- Product Specifications: 183 x 164 x 112mm
- Universal design for versatile water lines and control valves.
- Metal construction, all copper water line.
- Built-in check valve design.
- Ideal operating pressure: 0.1-0.5MPa
- Cold water inlet temperature: 4-29°C. Hot water inlet temperature: 55-85°C
- The pressure differential between hot and cold water should not exceed 0.2MPa.

Low pressure may result in unstable outlet water temperature.


- Inlet connections G1/2. Left for hot, Right for cold. Centre distance: 46mm.

OPERATION

- Solid wall installation or hollow wall installation.
- The adjustment range of embedment depth is 80-105mm.

STANDARDS

- Designed to meet GB18145-2014

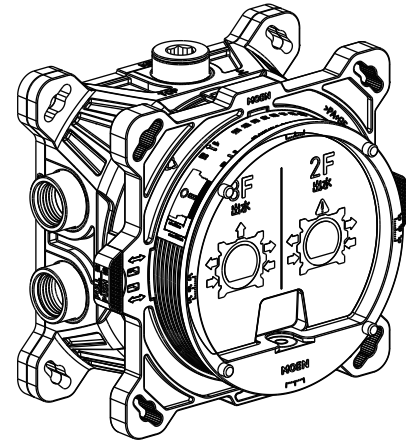

Universal In-Wall Shower Rough-In Box

MODELS: UR4000

Units: mm

