MOEN[®]_

DESCRIPTION

- Metal construction with a chrome finish
 - G1/2 inlet connections

OPERATION

- Levle style handle
- Anti-clockwise-on / Clockwise-off
- Single Cold

FLOW


• Flowrate is 0.33L/s minimum under 0.3Mpa

CARTRIDGE

- Ceramic 25mm cartridge design
 Nonmetallic / nonferrous and ceramic material

STANDARD

- Designed to meet GB standard and Cuctomer require WARRANTY
- 5 years limited warranty against leaks and drips





SINGLE COLD TAP

Wall Mount Single-Handle Tub/Shower Faucet (Without shower Head & Hose)

Models:2028V

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 35mm MIN. DIA. HOLE

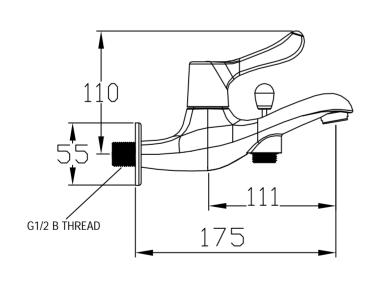



CRITICAL DIMENSION (DO NOT SCALE)

Rev 02/09

Specifications