


DESCRIPTION



- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes metal pop-up type waste assembly
- Includes 300mm long flexible inlet hoses

OPERATION



- Lever style handle
- Rotate hot side counterclockwise to open (clockwise to close) and rotate cold side clockwise to open (counterclockwise to close)
- Adjust the tilting plate to change the flow stream angle (+/- 8° adjustable aerator)

FLOW



- Flowrate is 0.2L/s minimum under 0.3Mpa

CARTRIDGE



- MS Ceramic cartridge design
- Nonmetallic / nonferrous and ceramic material

STANDARD




- Designed to meet GB standard


WARRANTY



- 5 years limited warranty against leaks and drips

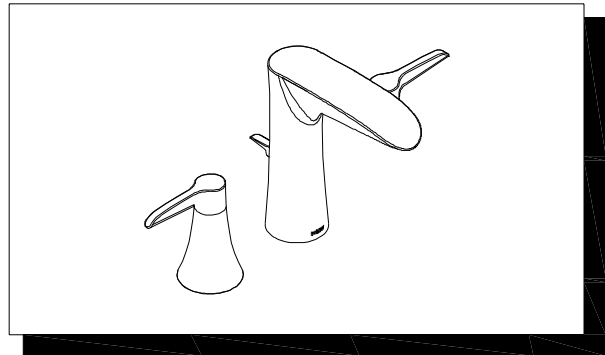

Cynthia 2H Widespread Lavatory
MODEL: 16228

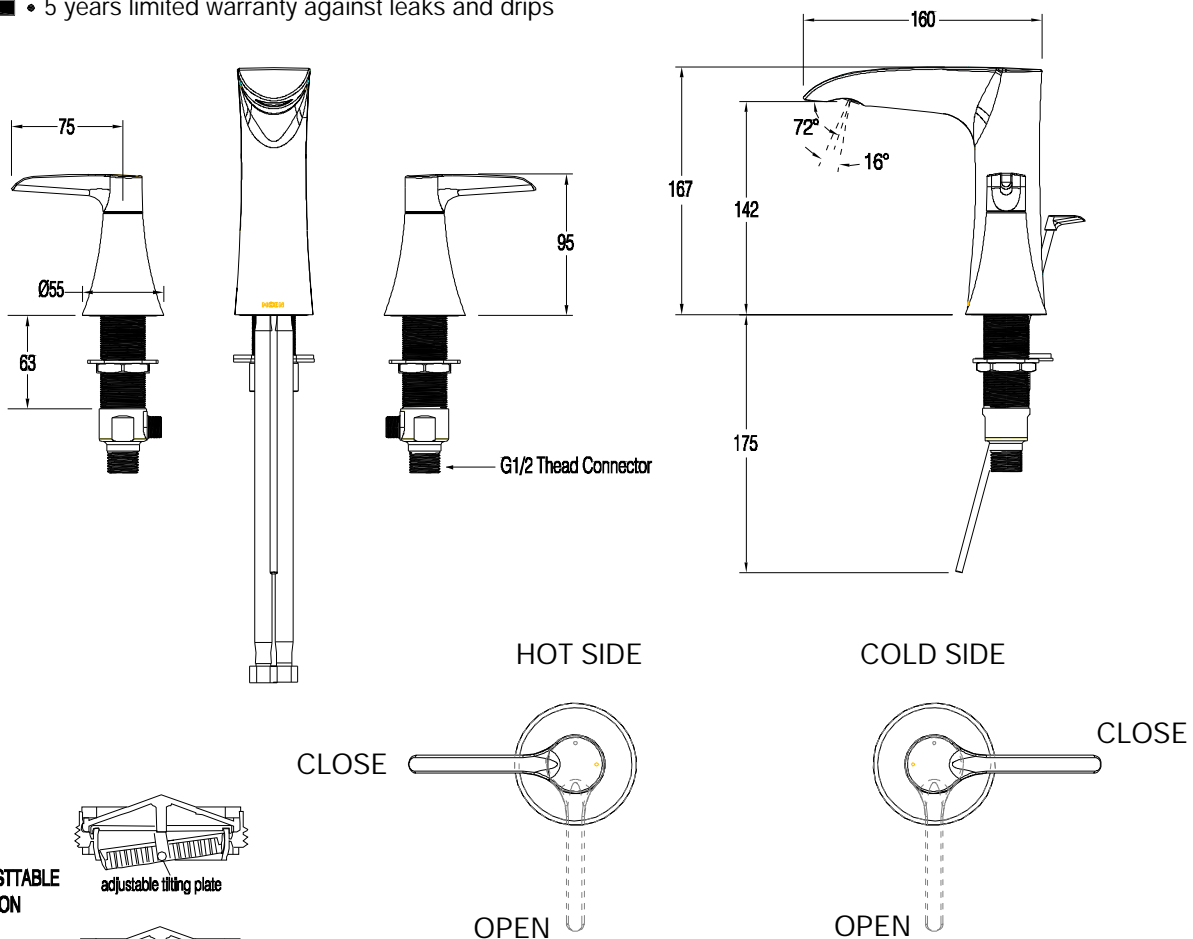

USAGE OF ADJUSTABLE
STREAM DIRECTION
+/-8° ADJUST

CRITICAL DIMENSION

(DO NOT SCALE)