

DESCRIPTION

- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

FLOW

- Flow is 0.2L/s minimum at 0.3Mpa without aerator.
- Flow is 0.15L/s maximum at 0.1Mpa with aerator.

CARTRIDGE


- MOEN Duralast 146565 cartridge design.
- Nonmetallic / nonferrous and ceramic material

STANDARD

- Designed to meet GB 18145

WARRANTY



- 5years limited warranty against leaks and drips

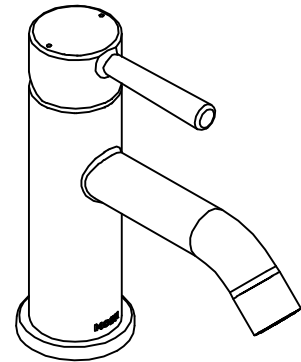

ESSENCE

Single Mount Single-Handle Lavatory Faucet

Models: 14121

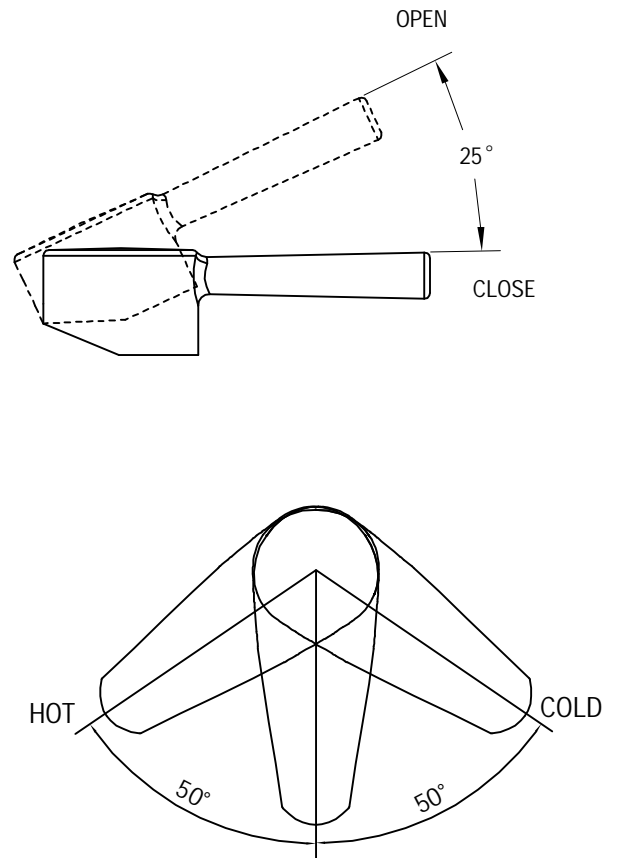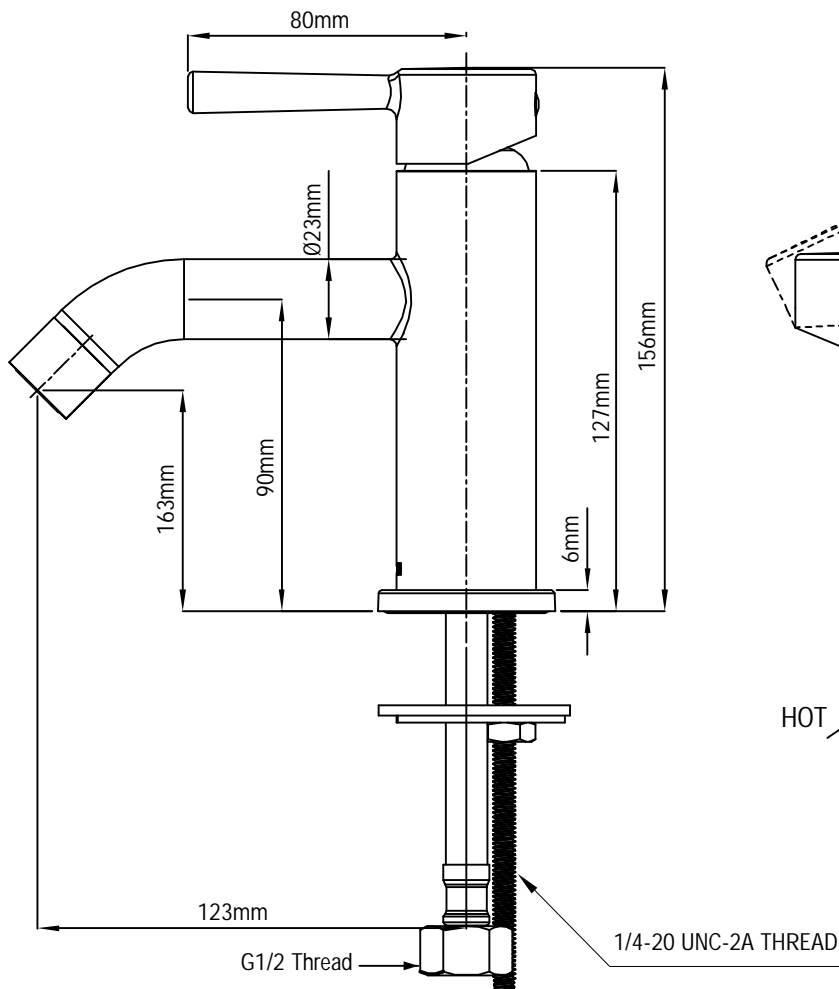

CRITICAL DIMENSION
(DO NOT SCALE)