

DESCRIPTION

- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes metal pop-up type waste assembly
- Includes 300mm long flexible inlet hoses

OPERATION

- Lever style handle
- Rotate hot side counterclockwise to open (clockwise to close) and rotate cold side clockwise to open (counterclockwise to close)

FLOW

- Flowrate is 0.2L/s minimum under 0.3Mpa

CARTRIDGE


- MS Ceramic cartridge design
- Nonmetallic / nonferrous and ceramic material

STANDARD





- Designed to meet GB standard

WARRANTY

- 5 years limited warranty against leaks and drips

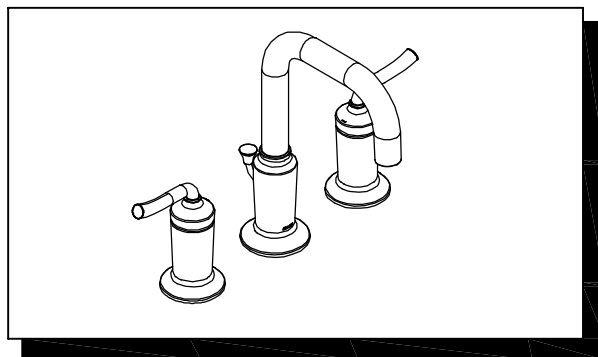

Neoclassic 2H Widespread Lavatory
MODEL: 16228

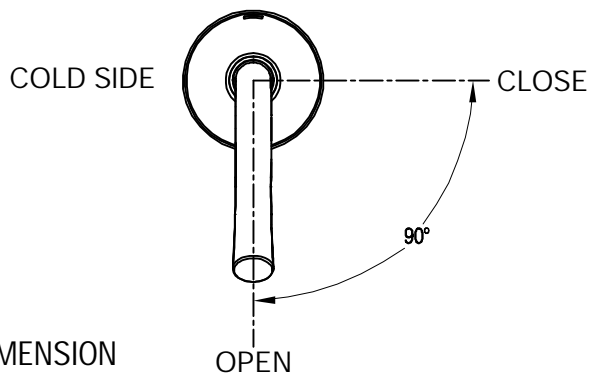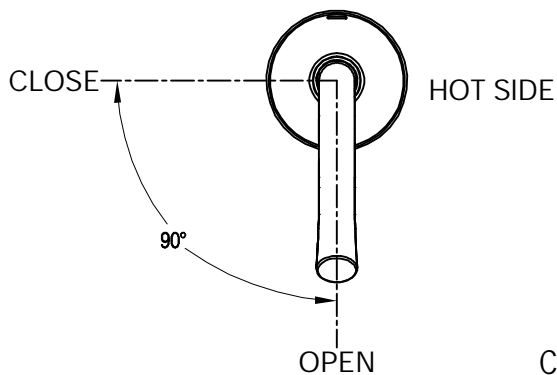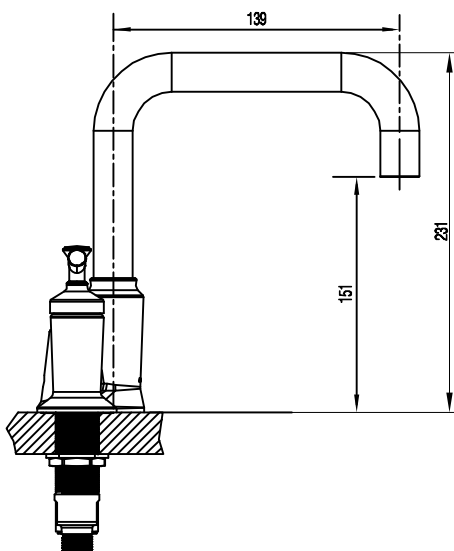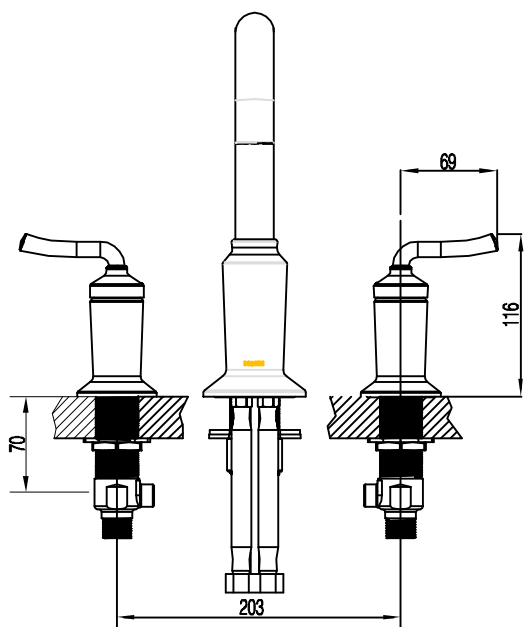

CRITICAL DIMENSION
(DO NOT SCALE)